

Smoothline Round Downpipes

Smooth downpipes featuring flush internal joints giving a cleanline appearance.



SMOOTHLINE ROUND DOWNPIPE SYSTEM


DOWNPIPE LENGTHS

PIPE (MM)	3m	1.5m	1m	OTHER SPECIFY LENGTH	WALL THICKNESS	A (MM)
63	RW1S/1	RW1S/4	RW1S/5	RW1/6	1.6	50
75	RW2S/1	RW2S/4	RW2S/5	RW2/6	1.6	50
100	RW3S/1	RW3S/4	RW3S/5	RW3/6	1.6	50
125	RW4S/1	RW4S/4	RW4S/5	RW4/6	2	60
150	RW5S/1	RW5S/4	RW5S/5	RW5/6	2.5	60




ACCESS PIPES & PLATES

PIPE (MM)	ACCESS PIPE COMPLETE WITH PLATE	ACCESS PLATE	A (MM)
63	RW1S/8	RW1/9	100
75	RW2S/8	RW2/9	100
100	RW3S/8	RW3/9	130
125	RW4S/8	RW4/9	165
150	RW5S/8	RW5/9	200

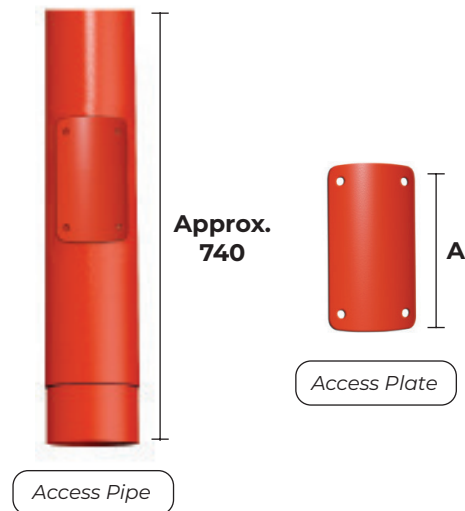

SHOES


PIPE (MM)	SHOE	A (MM)	B (MM)	C (MM)
63	RW1S/10	155	91	75
75	RW2S/10	168	104	75
100	RW3S/10	192	129	75
125	RW4S/10	245	153	100
150	RW5S/10	271	180	100

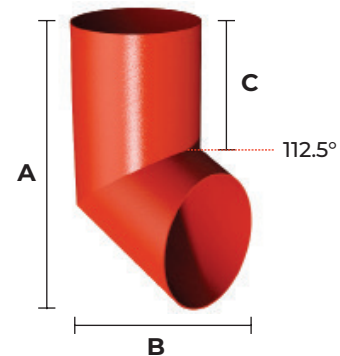

SMOOTHLINE ROUND DOWNPIPE SYSTEM

UNIVERSAL BRANCHES

PIPE (MM)	112.5° BRANCH	92.5° BRANCH	A (MM)	B (MM)
63	RW1S/11	RW1S/51	180	115
75	RW2S/11	RW2S/51	190	120
100	RW3S/11	RW3S/51	210	140
125	RW4S/11	RW4S/51	235	155
150	RW5S/11	RW5S/51	245	175

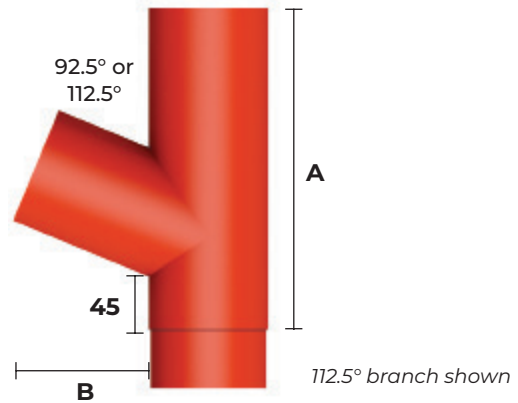

PIPE CLIPS

PIPE (MM)	PIPE CLIP	A (MM)	B (MM)
STANDARD PIPE CLIP			
63	RW1/16	30	110
75	RW2/16	30	115
100	RW3/16	30	145
125	RW4/16	30	190
150	RW5/16	30	190

These pipe clips give a 35mm stand off from back of pipe to wall.




PIPE (MM)	STAND OFF 100mm MAX	STAND OFF 200mm MAX	STAND OFF 300mm MAX	A (MM)	B (MM)
-----------	---------------------	---------------------	---------------------	--------	--------

STANDARD TEE BRACKET					
PIPE (MM)	STAND OFF 100mm MAX	STAND OFF 200mm MAX	STAND OFF 300mm MAX	A (MM)	B (MM)
63	RW1/17	RW1/18	RW1/19	52	100
75	RW2/17	RW2/18	RW2/19	52	100
100	RW3/17	RW3/18	RW3/19	52	100
125	RW4/17	RW4/18	RW4/19	52	140
150	RW5/17	RW5/18	RW5/19	52	140

PIPE (MM)	STAND OFF 100mm MAX	STAND OFF 200mm MAX	STAND OFF 300mm MAX	A (MM)	B (MM)
-----------	---------------------	---------------------	---------------------	--------	--------

MULLION TEE BRACKET					
PIPE (MM)	STAND OFF 100mm MAX	STAND OFF 200mm MAX	STAND OFF 300mm MAX	A (MM)	B (MM)
63	RW1/171	RW1/181	RW1/191	38	100
75	RW2/171	RW2/181	RW2/191	38	100
100	RW3/171	RW3/181	RW3/191	38	100
125	RW4/171	RW4/181	RW4/191	52	140
150	RW5/171	RW5/181	RW5/191	52	140

Other sizes and bespoke brackets on request.

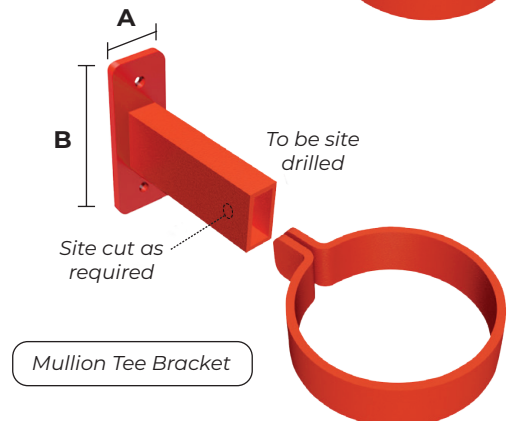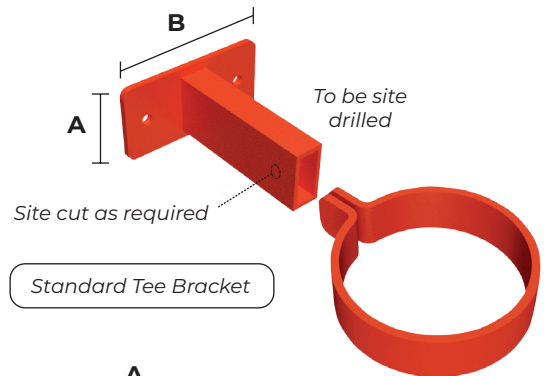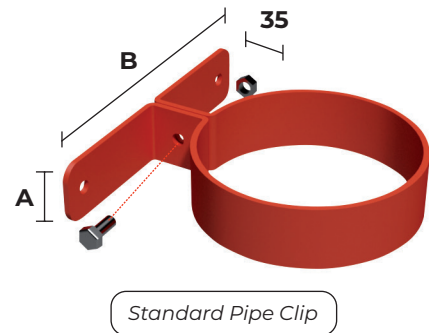


SMOOTHLINE ROUND DOWNPIPE SYSTEM

UNIVERSAL BENDS


PIPE (MM)	112.5° BEND	92.5° BEND	A (MM)	B (MM)
63	RW1S/21	RW1S/61	125	10
75	RW2S/21	RW2S/61	125	10
100	RW3S/21	RW3S/61	125	10
125	RW4S/21	RW4S/61	125	10
150	RW5S/21	RW5S/61	125	10

Usually used with a branch.

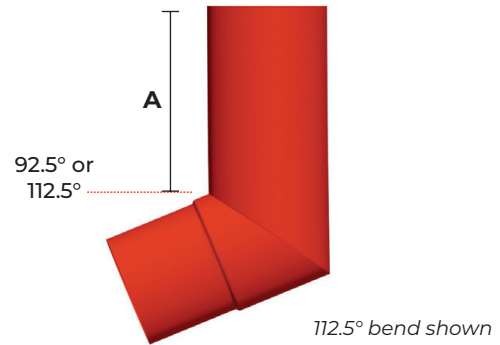

PLINTH OFFSETS

PIPE (MM)	OFFSET	A (MM)	B (MM)	P (MM)
63	RW1S/23	151	200	Please state size required
75	RW2S/23	157	200	
100	RW3S/23	167	200	
125	RW4S/23	177	200	
150	RW5S/23	188	200	

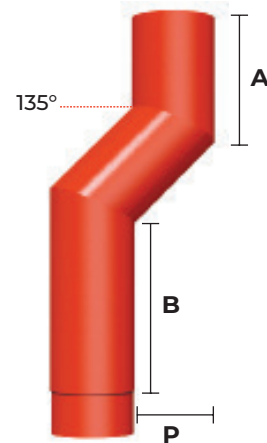

SWAN NECKS

PIPE (MM)	ONE PIECE STATE SIZE	TWO PIECE MAXIMUM PROJECTION OF SWAN NECKS						MINIMUM PROJECTION P
		300	450	600	900	1200	OTHER	
112.5° ANGLE								
63	RW1S/25	RW1S/26	RW1S/27	RW1S/28	RW1S/29	RW1S/30	Please specify A, B & P, projection angle RW?/31	105
75	RW2S/25	RW2S/26	RW2S/27	RW2S/28	RW2S/29	RW2S/30		115
100	RW3S/25	RW3S/26	RW3S/27	RW3S/28	RW3S/29	RW3S/30		130
125	RW4S/25	RW4S/26	RW4S/27	RW4S/28	RW4S/29	RW4S/30		150
150	RW5S/25	RW5S/26	RW5S/27	RW5S/28	RW5S/29	RW5S/30		170
92.5° ANGLE								
63	RW1S/65	RW1S/66	RW1S/67	RW1S/68	RW1S/69	RW1S/70	Please specify A, B & P, projection angle RW?/71	105
75	RW2S/65	RW2S/66	RW2S/67	RW2S/68	RW2S/69	RW2S/70		115
100	RW3S/65	RW3S/66	RW3S/67	RW3S/68	RW3S/69	RW3S/70		130
125	RW4S/65	RW4S/66	RW4S/67	RW4S/68	RW4S/69	RW4S/70		150
150	RW5S/65	RW5S/66	RW5S/67	RW5S/68	RW5S/69	RW5S/70		170

